


Mounting Lug Data


Types H1200, H2200, H3200, H3200-T, H6200, H7000, H8000

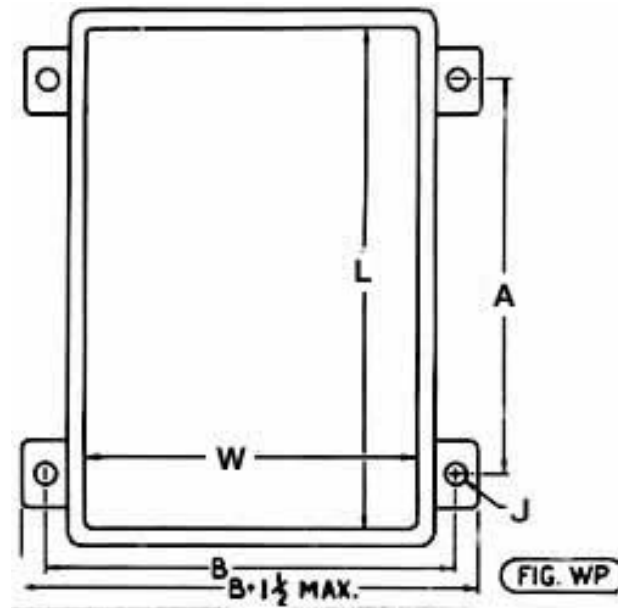

Box L. x W.	A	B	J	Box L. x W.	A	B	J
4 x 2	3	3	5/16	18 x 16	14	18 1/2	9/16
4 x 4	3	5	5/16	18 x 18	14	20 1/2	9/16
5 x 5	4	6	5/16	19 x 14	15	16 1/2	9/16
6 x 4	4	6	7/16	20 x 9	16	11 1/2	9/16
6 x 6	4	8	7/16	20 x 10	16	12 1/2	9/16
7 x 5	5	7	7/16	20 x 12	16	14 1/2	9/16
8 x 4	6	6	7/16	20 x 16	16	18 1/2	9/16
8 x 6	6	8	7/16	20 x 20	16	22 1/2	9/16
8 x 8	6	10 1/2	7/16	24 x 6	20	8	7/16
9 x 6	7	8	7/16	24 x 8	20	10 1/2	7/16
10 x 5	8	7	7/16	24 x 10	20	12 1/2	9/16
10 x 6	8	8	7/16	24 x 12	20	14 1/2	9/16
10 x 8	8	10 1/2	7/16	24 x 14	20	16 1/2	9/16
10 x 10	8	12 1/2	9/16	24 x 16	20	18 1/2	9/16

10 3/4 x 9	8 3/4	11 1/2	9/16	24 x 18	20	20 1/2	9/16
12 x 4	8	6	7/16	24 x 20	20	22 1/2	9/16
12 x 6	8	8	7/16	24 x 22	20	24 1/2	9/16
12 x 8	8	10 1/2	7/16	24 x 24	20	26 1/2	9/16
12 x 10	8	12 1/2	9/16	25 x 12 1/2	21	15	9/16
12 x 12	8	14 1/2	9/16	27 x 21	23	23 1/2	9/16
14 x 8	10	10 1/2	7/16	28 x 12	24	14 1/2	9/16
14 x 10	10	12 1/2	9/16	30 x 8	26	10 1/2	7/16
14 x 14	10	16 1/2	9/16	30 x 12	26	14 1/2	9/16
15 x 6	11	8	7/16	30 x 14	26	16 1/2	9/16
15 x 8	11	10 1/2	7/16	30 x 16	26	18 1/2	9/16
15 x 9	11	11 1/2	9/16	30 x 18	26	20 1/2	9/16
15 x 10	11	12 1/2	9/16	30 x 24	26	26 1/2	9/16
15 x 12	11	14 1/2	9/16	30 x 30	26	32 1/2	9/16
16 x 4	12	6	7/16	34 x 30	30	32 1/2	9/16
16 x 5	12	7	7/16	36 x 12	32	14 1/2	9/16
16 x 10	12	12 1/2	9/16	36 x 16	32	18 1/2	9/16
16 x 12	12	14 1/2	9/16	36 x 18	32	20 1/2	9/16
16 x 16	12	18 1/2	9/16	36 x 24	32	26 1/2	9/16
18 x 4	14	6	7/16	36 x 36	32	38 1/2	9/16
18 x 6	14	8	7/16	42 x 14	38	16 1/2	9/16
18 x 8	14	10 1/2	7/16	42 x 18	38	20 1/2	9/16
18 x 12	14	14 1/2	9/16	48 x 24	44	26 1/2	9/16
18 x 14	14	16 1/2	9/16				

Types H6000 and HD6000

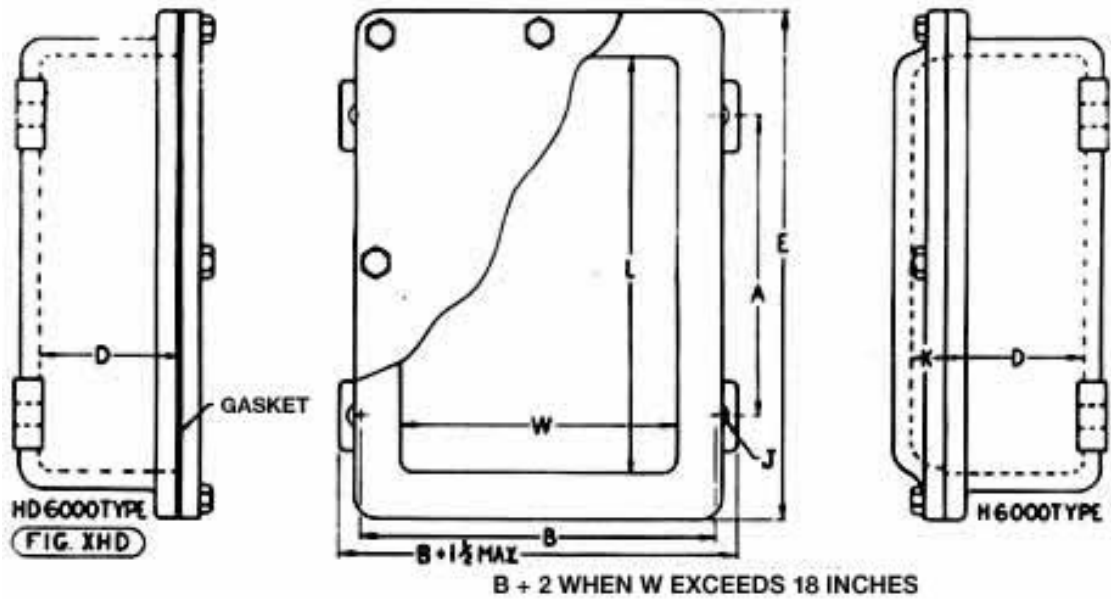

Box L. x W.	A	B	J	Box L. x W.	A	B	J
4 x 4	3	6	7/16	18 x 12	14	14 1/2	9/16
5 x 5	3	7	7/16	18 x 14	14	16 1/2	9/16
6 x 4	4	6	7/16	18 x 16	14	18 1/2	9/16
6 x 6	4	8	7/16	18 x 18	14	20 1/2	9/16
8 x 4	6	6	7/16	19 x 14	15	16 1/2	9/16
8 x 6	6	8	7/16	20 x 10	16	12 1/2	9/16
8 x 8	6	10 1/2	7/16	20 x 12	16	14 1/2	9/16
10 x 6	8	8	7/16	21 1/2 x 21 1/2	17 1/2	24	9/16
10 x 8	8	10 1/2	7/16	24 x 8	20	10 1/2	7/16
10 x 10	9	12 1/2	9/16	24 x 10	20	12 1/2	9/16
12 x 6	8	8	7/16	24 x 12	20	14 1/2	9/16
12 x 8	8	10 1/2	7/16	24 x 14	20	16 1/2	9/16
12 x 10	8	12 1/2	9/16	24 x 16	20	18 1/2	9/16
12 x 12	8	14 1/2	9/16	24 x 18	20	20 1/2	9/16
13 x 8 1/2	9	11	9/16	24 x 20	20	22 1/2	9/16
14 x 8	10	10 1/2	7/16	24 x 24	20	26 1/2	9/16
14 x 10	10	12 1/2	9/16	28 x 14	24	16 1/2	9/16
14 x 14	10	16 1/2	9/16	29 3/8 x 18 1/4	25 3/8	21 1/4	13/16
15 x 9	11	11 1/2	9/16	29 x 27	25	30	13/16
15 1/2 x 12	11 1/2	14 1/2	9/16	30 x 9 3/8	26	11 7/8	9/16
16 x 4	12	6	7/16	30 x 12	26	14 1/2	9/16
16 x 10	12	12 1/2	9/16	30 x 18	26	20 1/2	9/16
16 x 12	12	14 1/2	9/16	30 x 24	26	27	13/16
16 x 14	12	16 1/2	9/16	36 x 9 3/8	32	11 7/8	9/16
18 x 6	14	8	7/16	36 x 24	32	28	13/16

18 x 8	14	10 1/2	7/16	36 x 30	32	33	13/16
18 x 10	14	12 1/2	9/16	42 x 9 3/8	38	11 7/8	9/16

[Home Available Extras](#) | [Mounting Lug Data](#)
[Cross Reference](#) | [Ordering Information](#) | [Contact Us](#)

Hope Electrical Products Co., Inc.
7 Fairfield Crescent • West Caldwell, NJ 07006
Phone: 973-882-7400 • Fax: 973-244-9292

Copyright ©2002 Hope Electrical Products Co., Inc.